



GMT Fuse Panel
-/+24 to 48V DC

GMT FUSE PANEL -/+24 TO 48V DC

- Positions Per Bus: 20
- Max Per Position: 15 Amps
- Bus Capacity: 125 Amps
- Made in the USA



Part Number

7074111001

GENERAL

Dimensions:	19.00" W x 1.75" H x 11.250" D
Rack Space:	1U
Weight:	6.0 lbs.
Mounting:	Universal 19" or 23", WECO or EIA
Mtg. Pos.:	Flush, 4" or 5" Offset
Finish:	Black Textured Powder Coat

ELECTRICAL

Input:	Nominal Voltage:	-/+24-48V DC
	Voltage Range:	-/+19-60V DC
	Number of Buses:	2
	Intr. Device Rating:	150 Amps
Output:	Max Fuse Rating:	15 Amp
	Continuous Load Rating:	10.5 Amps

ALARMING

Indicators:	Green (Power)/Red (Alarm)
Function:	Form C relay contacts for remote fuse and power fail indication
Conn. Type:	Solderless Wire Wrap (18 to 30 AWG)
Rating:	DC 30W/AC 50VA

CONNECTIONS

Input:	2 Hole Lug	1/4" stud x 5/8" spacing
	Wire Range	Up to 2/0 AWG
	Max. Terminal Width	0.640"
Tightening Torque	40 in-lb (4.5 Nm)	
	Output: Connection Type	
Output:	Set Screw Output	
	Wire Range	12 to 22 AWG
	Max. Terminal Width	No Terminals Required
Tightening Torque	5 in-lb (.5 Nm)	
	Ground	2 Hole Lug
Bus:	Wire Range	6 AWG lug supplied with panel

ENVIRONMENT

Short Term Op Temp:	-40° C to +70° C
Ambient:	Up to 65° C
Store Temp:	-40° C to +70° C
Humidity:	0 to 95% non-condensing
Power Dissipation:	43 Watts max

STANDARDS


Safety:	UL 60950-1/UL 1801/CSA C22.2 (Listed)
Telcordia:	No.60950-1/EN 60950-1/IEC 60950-1
	NEBS Level 3 (GR-63/GR-1089) and GR-3108 Class 3 (w/o salt fog testing)





GMT Fuse Panel
-/+24 to 48V DC

20/20 GMT FUSE PANEL, STUD INPUT, SET SCREW OUTPUT

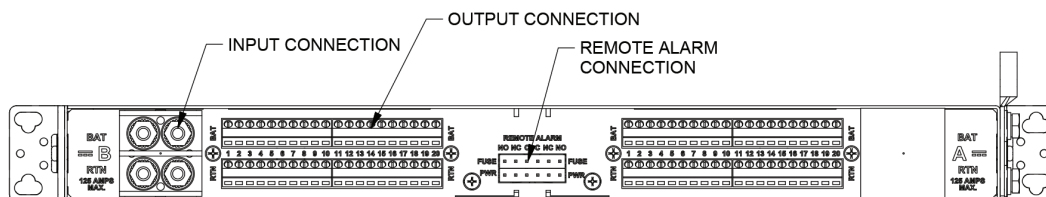

REAR VIEW ROTATED

